


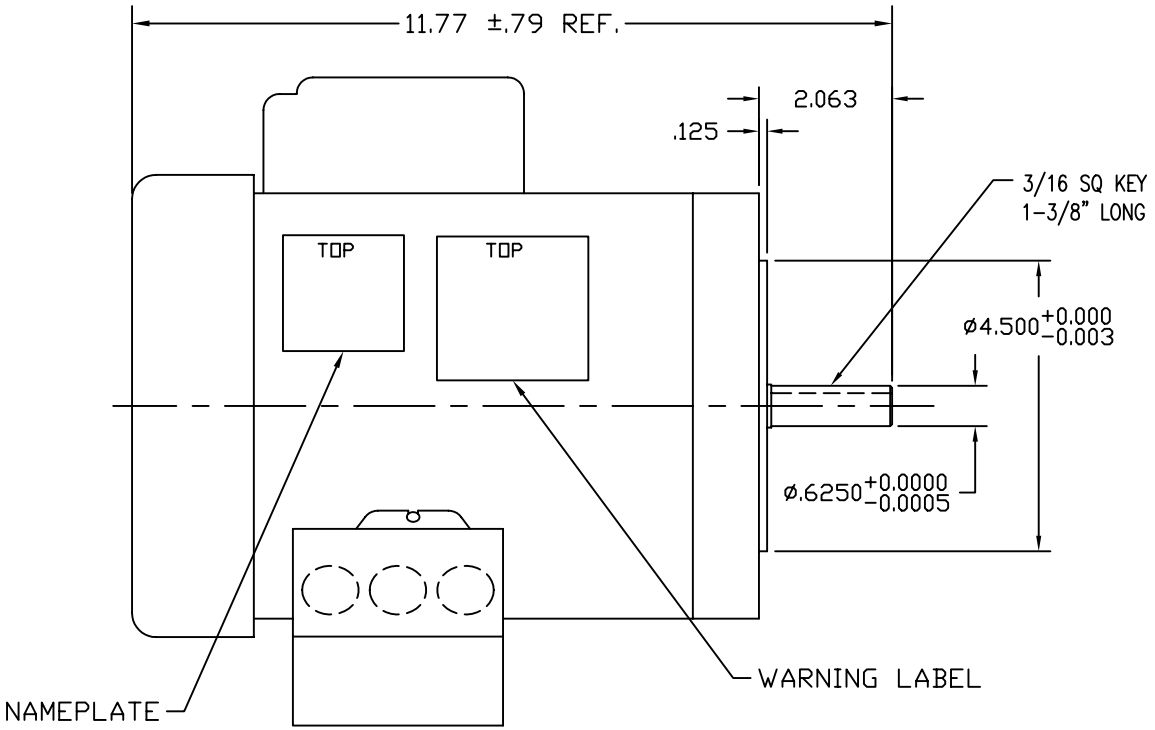


DESCRIPTIONS:

CAP. START/CAP. RUN MOTOR, 1HP, 60, 1 PHASE,
56C FRAME, TEFC, NO BASE, 1725/1425RPM,
AC VOLTS: 100-120/200-240
INSULATION CLASS: B
THERMAL PROTECTION: AUTOMATIC
ROTATION: REVERSIBLE
SERVICE FACTOR AMPS: 13.0-10.7/6.5-5.4

| | |
|---|---|
| SERVICE FACTOR: | 1.35, |
| FULL LOAD AMPS: | 10.7-9.25/5.4-4.7 |
| TORQUE (OZ-FT) | |
| FULL LOAD: | 48.7 |
| LOCKED ROTOR: | 176.3 @120V |
| BREAKDOWN | 144.4 @120V |

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
INTERPRET DIM AND TOL PER ASME Y14.5M – 1994
TOLERANCES:
DECIMALS: .XX ±.010, .XXX ±.005, .XXXX ±.0005
FRACTIONAL: ± 1/32
ANGULAR: ± 30'
BREAK ALL EDGES
ALL HOLES CHAMFERED .01x45°
SURFACE ROUGHNESS: 125 µIN BEFORE PLATING
THIRD ANGLE PROJECTION

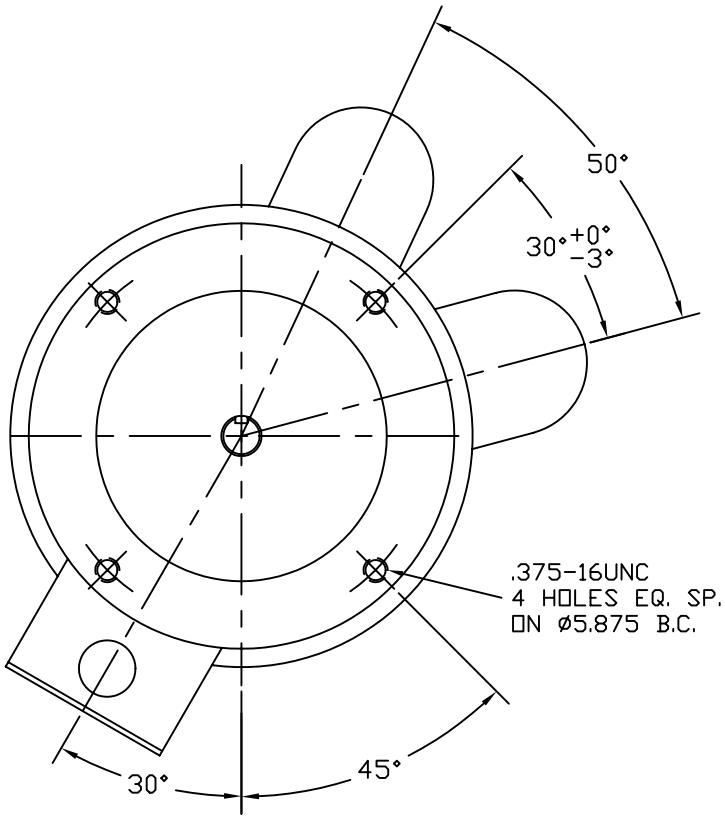THIS DRAWING AND THE INFORMATION ON IT ARE THE PROPERTY OF HALLMARK INDUSTRIES, INC. AND IS NOT TO BE USED OR DUPLICATED WITHOUT PRIOR AUTHORIZATION

HALLMARK INDUSTRIES, INC.
733 BROOKDALE DRIVE, SCHAUMBURG, IL 60194 PHONE: (847)882-8821 FAX: (847)882-5658

TITLE: AC MOTOR, 1HP, 120/240V, 60HZ
56C NO BASE, THERMO PROT
FM 26458

| DRAWN | DRAWN DATE | CHECKED | CHECK DATE |
|---|---|---|---|
| GCS | 4/30/03 | | |

| SIZE | DWG NO. | REV |
|---|---|---|
| B | MA0131X | – |

| SCALE | ALT. NO. | SHEET |
|---|---|---|
| 1:2 | | 1 OF 1 |